
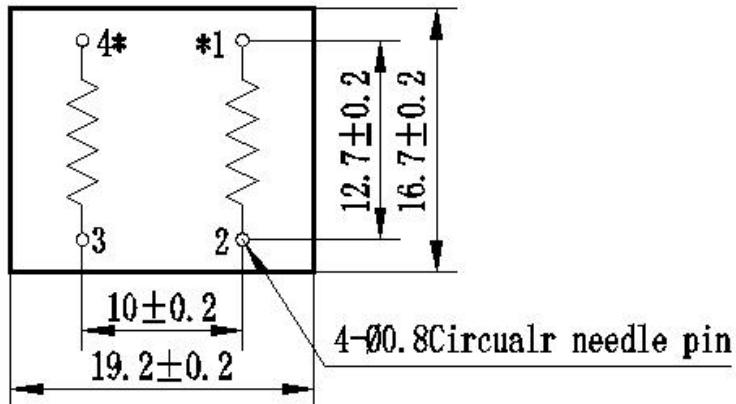


ZMPT101C

Current-type Voltage Transformer

Small size, high accuracy, good consistency, for voltage and power measurement

Structural parameters:

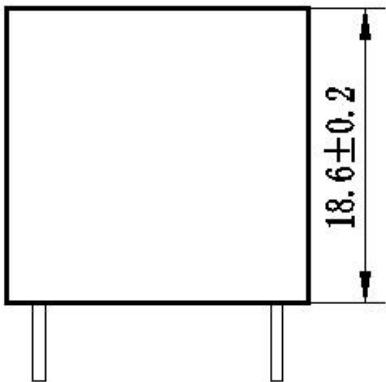

Remarks: primary input: 1、2 pins secondary output: 3、4pins

Or

primary input:: 3、4 pins secondary output::1、2pins

“**” Same polarity


Front view

Bottom view

The main technical parameters:


| | | |
|-----------------------|---|---------------------------------|
| Model | ZMPT101C | |
| Rated input current | 2mA | |
| Rated output current | 2mA | |
| turns ratio | 1000:1000 | |
| phase angle error | $\leq 20'$ (input 2mA, sampling resistor 100Ω) | |
| linear range | 0~1000V | 0~10mA (sampling resistor 100Ω) |
| linearity | $\leq 0.2\%$ (20%dot~120%dot) | |
| Permissible error | $-0.3\% \leq f \leq +0.2\%$ (input 2mA, sampling resistor 100Ω) | |
| isolation voltage | 4000V | |
| application | voltage and power measurement | |
| Encapsulation | Epoxy | |
| installation | PCB mounting (Pin Length>3mm) | |
| Operating temperature | -40°C ~+60°C | |
| Case Material | ABS (Note: ABS CASE is NOT available for wave-soldering) | |

Direction for use:

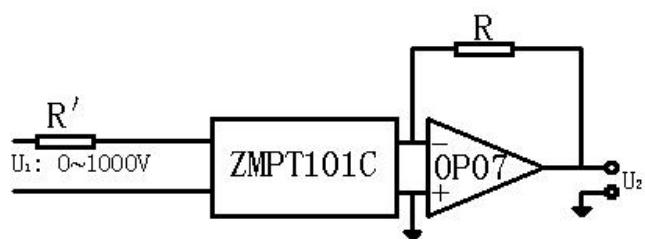**Figure I**

1. The typical usage of the product is for the active output (Figure I). R' is a limiting resistor, R is a sampling resistor.

2. The product can be directly through the resistance sampling , easy to use (Figure II).

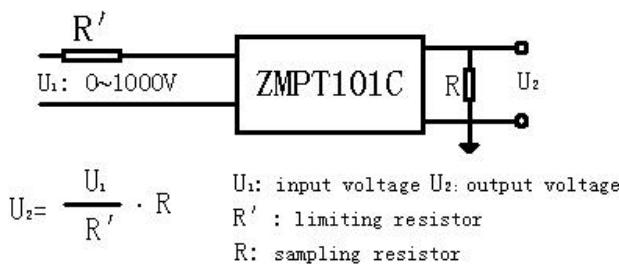**Figure II**

$U_2 = \frac{U_1}{R'} \cdot R$

U₁: input voltage U₂: output voltage
 R' : limiting resistor
 R : sampling resistor